



- ✓ PUR cable suitable for oily environments
- ✓ Size S8 (M8×1 thread)
- ✓ 3 poles
- ✓ IP68

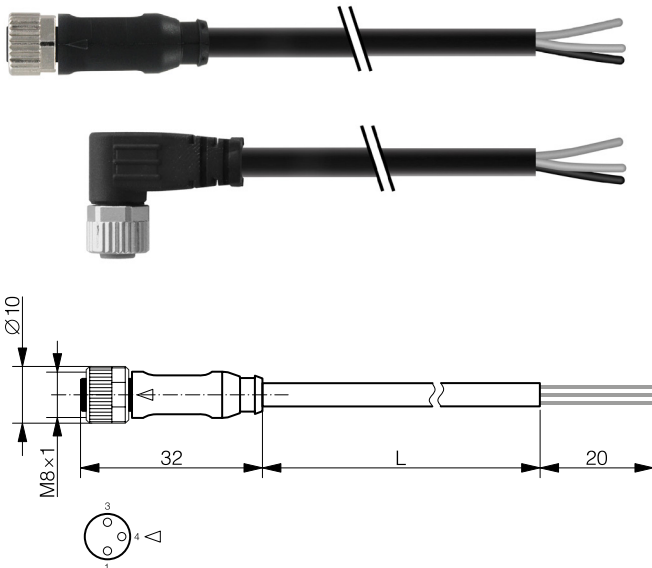

S08-3FxG-xxx

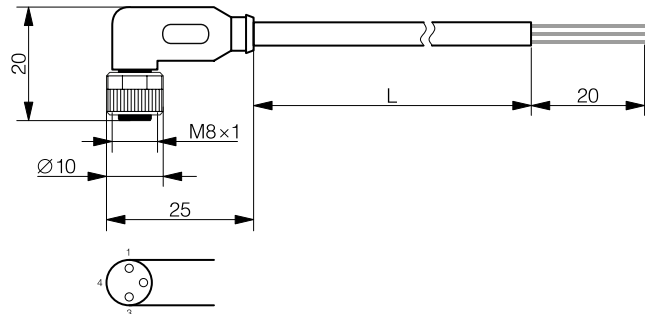

S08-3FxFW-xxx

### TECHNICAL DATA\*

Jacket material	See table "Available types" below	Insulation group	IEC 60664-1, category I
Connector material	Nickel-plated zinc	Enclosure rating	IP68
Rated voltage	max. 50/60 VAC/VDC	Ambient temperature range	-25...+80°C (90°C max. 10h)
Rated current per contact	max. 4.0 A	Wire structure	0.25 mm <sup>2</sup>
Rated surge voltage	max. 1.5 kV	Tightening torque	0.4 Nm

\*according to DIN EN 61076-2-101

### AVAILABLE TYPES

Part number	Part reference	Type	Cable color	Jacket material	Outer cable Ø	Length**
605-002-375	S08-3FUW-020	right-angle	black	PUR	4.1 mm ± 5%	2 m
605-002-370	S08-3FUG-050	straight	black	PUR	4.1 mm ± 5%	5 m
605-002-369	S08-3FUG-020	straight	black	PUR	4.1 mm ± 5%	2 m
605-002-377	S08-3FUW-100	right-angle	black	PUR	4.1 mm ± 5%	10 m
605-002-371	S08-3FUG-100	Straight	black	PUR	4.1 mm ± 5%	10 m
605-002-376	S08-3FUW-050	Right-Angle	black	PUR	4.1 mm ± 5%	5 m
605-002-327	S08-3FVG-150	straight	black	PVC	4.4 mm ± 5%	15 m
623-100-101	S08-3FVW-020	right-angle	black	PVC	4.4 mm ± 5%	2 m
623-100-102	S08-3FVG-020	straight	black	PVC	4.4 mm ± 5%	2 m
623-100-108	S08-3FVW-050	right-angle	black	PVC	4.4 mm ± 5%	5 m
623-100-109	S08-3FVW-100	right-angle	black	PVC	4.4 mm ± 5%	10 m
623-100-110	S08-3FVG-050	straight	black	PVC	4.4 mm ± 5%	5 m
623-100-111	S08-3FVG-100	straight	black	PVC	4.4 mm ± 5%	10 m
623-100-130	S08-3FVW-150	right-angle	black	PVC	4.4 mm ± 5%	15 m

Note: additional suffix can appear to indicate a revision version or a special version.

\*\*other lengths upon request

Operators of the products we supply are responsible for compliance with measures for the protection of persons. The use of our equipment in applications where the safety of persons might be at risk is only authorized if the operator observes and implements separate, appropriate and necessary measures for the protection of persons and machines. Terms of delivery and rights to change design reserved. Please check our website for updates.