





AEC3057- ■ ■ A Cable Clamp with Rubber Bushing

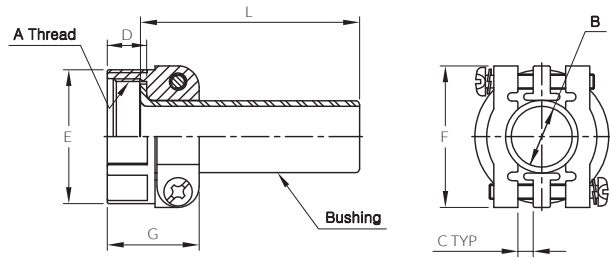

Unit : mm

Part No.	Connector Shell Size	A Thread Class 2B	B ±0.41	C TYP	D ±0.41	E ±0.79	F ±0.79	G ±0.79	L ±0.79	Bushing Ref.
AEC3057 - 4A	10SL, 12S & 12	5/8-24 UNEF	5.59	1.57	10.31	20.62	22.23	20.62	69.85	AEC3420 - 4A
AEC3057 - 6A	14S & 14	3/4-20 UNEF	7.92	1.98	10.31	24.61	26.97	22.23	66.68	AEC3420 - 6A
AEC3057 - 8A	16S & 16	7/8-20 UNEF	11.10	2.77	10.31	27.79	29.36	23.83	63.50	AEC3420 - 8A
AEC3057 - 10A	18	1-20 UNEF	14.27	3.18	10.31	30.18	31.75	23.83	60.33	AEC3420 - 10A
AEC3057 - 12A	20, 22	1 3/16-18UNEF	15.88	3.9	10.31	34.93	37.31	23.83	57.15	AEC3420 - 12A
AEC3057 - 16A	24, 28	1 7/16-18UNEF	19.05	4.78	10.31	42.06	42.88	26.19	53.98	AEC3420 - 16A
AEC3057 - 20A	32	1 3/4-18UNS	23.80	6.35	11.91	51.59	51.59	27.79	50.80	AEC3420 - 20A
AEC3057 - 24A	36	2-18UNS	31.75	7.54	13.49	56.36	57.94	29.36	47.63	AEC3420 - 24A

AEC3420 Rubber Bushing for Cable Clamps

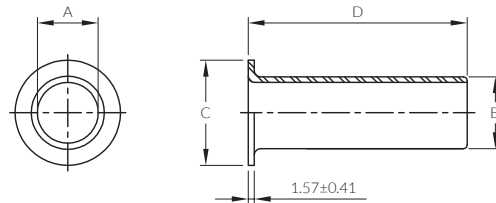

Unit : mm

Part No.	Connector Shell Size	A ±0.41	B ±0.41	G ±0.41	D ±0.79	Cable Clamp Ref.
AEC3420 - 4	10SL, 12S & 12	5.59	7.67	12.83	69.85	AEC3057 - 4A
AEC3420 - 6	14S & 14	7.92	10.85	15.72	66.68	AEC3057 - 6A
AEC3420 - 8	16S & 16	11.10	14.02	18.90	63.50	AEC3057 - 8A
AEC3420 - 10	18	14.27	15.62	22.58	60.33	AEC3057 - 10A
AEC3420 - 12	20, 22	15.88	18.80	27.53	57.15	AEC3057 - 12A
AEC3420 - 16	24, 28	19.05	23.55	33.38	53.98	AEC3057 - 16A
AEC3420 - 20	32	23.80	31.50	40.59	50.80	AEC3057 - 20A
AEC3420 - 24	36	31.75	34.67	46.91	47.63	AEC3057 - 24A